


This tutorial shows how to remove the front foil from the front tiller assembly of the XE-1.

TOOLS REQUIRED

| ID | Description | Task |
|----|-------------|--|
| | M4 Hex Key | M6 Countersink Cap Screws – Foil to Tiller Strut |

1. Work Instruction - Remove Steering Fork Assembly with bearings

1.1 Loosen (anti-clockwise) the M4 x 35mm aluminium screws and remove the screws with a M4 Hex Key.

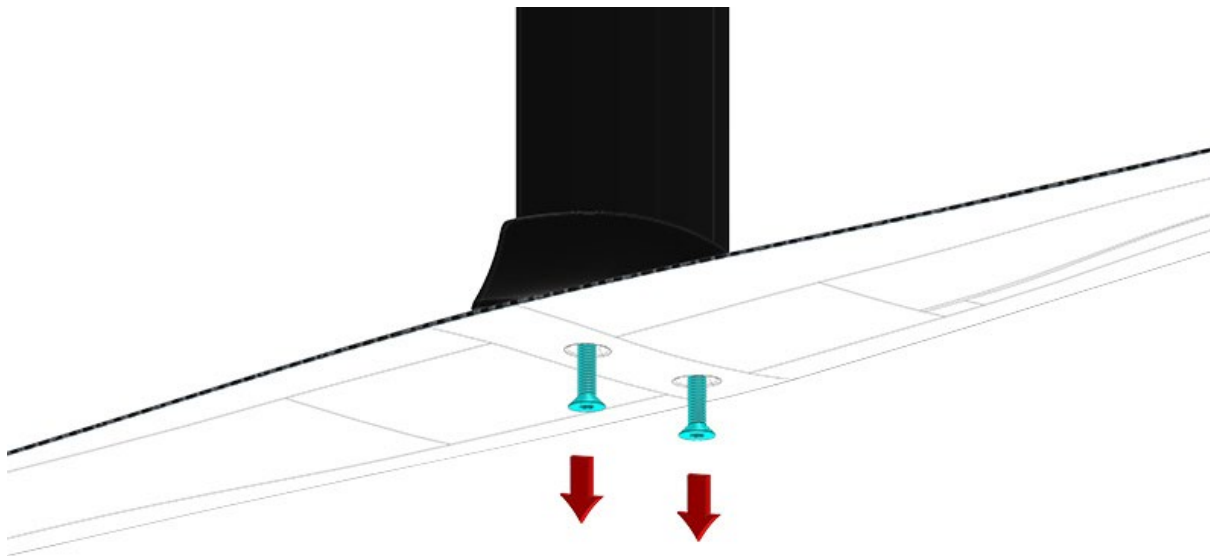

1.2 Remove the Steering Fork Tube with bearings by pulling it downwards out of the frame.

